Main PIP-II parameters

Linac

Parameters of linac beam at exit

Linac current: $I_{linac} := 2 \cdot 10^{-3}$ A

Linac Energy: $E_{linac} := 800 \cdot 10^{6}$ eV

Repetition rate: $f_{rep} := 20$ Hz

Hor. rms norm. emittance: $\varepsilon_{nxL} := 0.3 \cdot 10^{-4}$ cm

Vert rms norm. emittance: $\varepsilon_{nyL} := 0.32 \cdot 10^{-4}$ cm

Long rms norm. emittance: $\varepsilon_{nsL} := 0.35 \cdot 10^{-4}$ cm

$\frac{\varepsilon_{nsL} \cdot m_p}{c} = 1.095 \times 10^{-6}$ eV s

Beam pulse duration (copied from Booster section): $T_{inj} := 0.548 \cdot 10^{-3}$ s

$T_{inj} \cdot f_{rep} = 1.096\%$

$P_{linac} := I_{linac} \cdot E_{linac} \cdot T_{inj} \cdot f_{rep} \cdot 10^{-3} = 17.536$ kW

Parameters of Linac Cavities

ii :=

	0
0	"Name"
1	"f [MHz]"
2	"N cell"
3	"beta-opt"
4	"beta-geom"
5	"apert. [mm]"
6	"U_max [MV]"
7	"E.peak [MV/m]"
8	"Bpeak [mT]"
9	"G [Ohm]"
10	"R/Q [Ohm]"
11	"Q0"
12	"cavities/crm"
13	"Number of cryomodules"
14	"Stat. load @2K[W/crm]"
15	"Max. microphbics detune [Hz]"
16	"Power transfer efficiency"
17	"power margin"
18	"Accelerating phase [deg]"
19	"Static +dynamic load @ 5 K [W/crm]"
20	"Static +dynamic load @70 K [W/crm]"
21	"Dynamic load coupler@2K,60kW [W]"
22	"Dynamic load coupler @5K,60kW [W]"
23	"Dynamic load coupler@70K,60kW [W]"
24	

:=

	0	1	2	3	4	5
0	"MEBT"	"HWR"	"SSR1"	"SSR2"	"LB650"	"HB650"
1	162.5	162.5	325	325	650	650
2	2	2	2	2	5	5
3	0.067	0.112	0.222	0.475	0.647	0.971
4	0.56	0.094	0.186	0.398	0.61	0.92
5	20	33	30	40	83	118
6	0.1	2	2.05	4.987	11.9	19.9
7	6	44.938	38.4	40	39.7	38.3
8	0	48.321	58.1	64.5	75.4	73
9	0	48	84	115	191	260
10	503	275	242	297	377	610
11	$1.053 \cdot 10^{4}$	$5 \cdot 10^{9}$	$6 \cdot 10^{9}$	$8 \cdot 10^{9}$	$2.15 \cdot 10^{10}$	$3 \cdot 10^{10}$
12	1	8	8	5	3	6
13	3	1	2	7	11	4
14	0	14	12	8.8	2.5	4.7
15	0	20	20	20	20	20
16	0.9	0.9	0.9	0.9	0.94	0.94
17	0.8	0.8	0.8	0.8	0.8	0.8
18	90	0	0	0	0	0
19	0	60	70.6	49.8	8.7	17.2
20	0	250	193.6	145.1	63.8	118.4
21	0	0	0	0	0	0
22	0	0	0	0	0	0
23	0	0	0	0	0	0
24	0	0	0	0	0	

24	...	24	0	0	0	0	0	...

$ic := 0..5$ $\quad f_{c_{ic}} := 10^6 \cdot M_{1,ic}$ $\quad n_{cell_{ic}} := M_{2,ic}$ $\quad \beta_{opt_{ic}} := M_{3,ic}$ $\quad \beta_{g_{ic}} := M_{4,ic}$ $\quad \beta_{g_4} := 0.631$ $\quad \beta_{g_5} := 0.947$

$U_{max_{ic}} := 10^6 \cdot M_{6,ic}$ $\quad G_{c_{ic}} := M_{9,ic}$ $\quad R_Q_{ic} := M_{10,ic}$ $\quad Q_{0_{ic}} := M_{11,ic}$ $\quad \delta f_{mf_{ic}} := M_{15,ic}$ $\quad \varphi_{acc_{ic}} := \frac{\pi}{180} \cdot M_{18,ic}$

$Leff := \overrightarrow{\left(\frac{1}{2 \cdot f_c} \cdot c \cdot \beta_{opt} \cdot n_{cell}\right)}$ $\quad E_{acc} := \overrightarrow{\left(\frac{U_{max}}{0.01 \cdot Leff}\right)}$ $\quad Epeak_Eacc_{ic} := \frac{M_{7,ic}}{E_{acc_{ic}} \cdot 10^{-6}}$ $\quad Bpeak_Eacc_{ic} := \frac{M_{8,ic}}{E_{acc_{ic}} \cdot 10^{-6}}$

Surface resistance: $R_{s_{ic}} := \frac{G_{c_{ic}}}{Q_{0_{ic}}}$ Cavity bandwidth: $\Delta f_{c_{ic}} := \frac{M_{9,ic}}{M_{11,ic}}$ Energy stored in the cavity: $En_{cav} := \overrightarrow{\left(\frac{U_{max}^2}{R_Q} \cdot \frac{1}{2 \cdot \pi \cdot f_c}\right)}$

Optimal coupling: $\beta_{cpl_{ic}} := \sqrt{\left(1 + \frac{I_{linac} \cdot \cos(\varphi_{acc_{ic}}) \cdot R_Q_{ic} \cdot Q_{0_{ic}}}{U_{max_{ic}}}\right)^2 + \left(\frac{2 \cdot \delta f_{mf_{ic}} \cdot Q_{0_{ic}}}{f_{c_{ic}}}\right)^2}$ Loaded Q: $Q_L := \frac{Q_0}{1 + \beta_{cpl}}$

Required cavity power: $P_{req}(U_{max}, \varphi_{acc}, R_Q, Q_0, \beta_{cpl}, f_c, \delta f) := \frac{(U_{max})^2 \cdot (1 + \beta_{cpl})^2}{4 \cdot \beta_{cpl} \cdot Q_0 \cdot R_Q} \cdot \left[\left[1 + \frac{I_{linac} \cdot \cos(\varphi_{acc}) \cdot R_Q \cdot Q_0}{U_{max} \cdot (1 + \beta_{cpl})}\right]^2 + \left(\frac{Q_0}{1 + \beta_{cpl}} \cdot \frac{2 \cdot \delta f}{f_c}\right)^2\right]$

$P_{r_{ic}} := P_{req}(U_{max_{ic}}, \varphi_{acc_{ic}}, R_Q_{ic}, Q_{0_{ic}}, \beta_{cpl_{ic}}, f_{c_{ic}}, \delta f_{mf_{ic}})$

Generator power: $P_{g_{ic}} := \frac{P_{r_{ic}}}{M_{16,ic} \cdot M_{17,ic}}$ Cavity bandwidth: $\Delta f_{c_{ic}} := \frac{f_{c_{ic}}}{Q_{0_{ic}}} \cdot (1 + \beta_{cpl_{ic}})$ Cavity detuning: $\Delta f_{dtn_{ic}} := -f_{c_{ic}} \cdot \frac{I_{linac} \cdot \sin(\varphi_{acc_{ic}}) \cdot R_Q_{ic}}{2 \cdot U_{max_{ic}}}$

$Leff = \begin{pmatrix} 12.361 \\ 20.663 \\ 20.478 \\ 43.816 \\ 74.602 \\ 111.961 \end{pmatrix}$ cm $\quad E_{acc} \cdot 10^{-6} = \begin{pmatrix} 0.809 \\ 9.679 \\ 10.011 \\ 11.382 \\ 15.951 \\ 17.774 \end{pmatrix}$ MV/m $\quad Epeak_Eacc = \begin{pmatrix} 7.416 \\ 4.643 \\ 3.836 \\ 3.514 \\ 2.489 \\ 2.155 \end{pmatrix}$ $\quad Bpeak_Eacc = \begin{pmatrix} 0 \\ 4.992 \\ 5.804 \\ 5.667 \\ 4.727 \\ 4.107 \end{pmatrix}$ $\quad En_{cav} = \begin{pmatrix} 0.019 \\ 14.246 \\ 8.504 \\ 41.007 \\ 91.973 \\ 158.958 \end{pmatrix}$ J

$$R_s \cdot 10^9 = \begin{pmatrix} 0 \\ 9.6 \\ 14 \\ 14.375 \\ 8.884 \\ 8.667 \end{pmatrix} n\Omega \qquad \beta_{cpl} = \begin{pmatrix} 1 \\ 1846.123 \\ 1598.397 \\ 1370.894 \\ 1899.746 \\ 2606.646 \end{pmatrix} \qquad P_g \cdot 10^{-3} = \begin{pmatrix} 2.622 \\ 6.509 \\ 6.062 \\ 16.899 \\ 37.904 \\ 63.982 \end{pmatrix} kW \qquad \overrightarrow{\left(I_{linac} \cdot U_{max} \cdot \cos(\varphi_{acc})\right)} \cdot 10^{-3} = \begin{pmatrix} 0 \\ 4 \\ 4.1 \\ 9.974 \\ 23.8 \\ 39.8 \end{pmatrix} kW$$

$$\Delta f_c = \begin{pmatrix} 30864.198 \\ 60.031 \\ 86.634 \\ 55.733 \\ 57.464 \\ 56.499 \end{pmatrix} Hz \qquad \Delta f_{dtn} = \begin{pmatrix} -817.375 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{pmatrix} Hz \qquad Leff = \begin{pmatrix} 12.361 \\ 20.663 \\ 20.478 \\ 43.816 \\ 74.602 \\ 111.961 \end{pmatrix} m \qquad Q_L = \begin{pmatrix} 5.265 \times 10^3 \\ 2.707 \times 10^6 \\ 3.751 \times 10^6 \\ 5.831 \times 10^6 \\ 1.131 \times 10^7 \\ 1.15 \times 10^7 \end{pmatrix} \qquad \begin{pmatrix} MEBT \\ HWR \\ SSR1 \\ SSR2 \\ LB650 \\ HB650 \end{pmatrix}$$

$\delta f := 0, 0.5 .. 30 \qquad icc := 2$

$$\frac{P_{req}\left(U_{max_{ic}}, \varphi_{acc_{ic}}, R_Q_{ic}, Q_{0_{ic}}, \beta_{cpl_{ic}}, f_{c_{ic}}, \delta f\right)}{P_{req}\left(U_{max_{ic}}, \varphi_{acc_{ic}}, R_Q_{ic}, Q_{0_{ic}}, \beta_{cpl_{ic}}, f_{c_{ic}}, 0\right)}$$

$$\frac{P_{req}\left(U_{max_{icc}}, \varphi_{acc_{icc}}, R_Q_{icc}, Q_{0_{icc}}, \beta_{cpl_{icc}}, f_{c_{icc}}, \delta f\right)}{P_{req}\left(U_{max_{icc}}, \varphi_{acc_{icc}}, R_Q_{icc}, Q_{0_{icc}}, \beta_{cpl_{icc}}, f_{c_{icc}}, 0\right)}$$

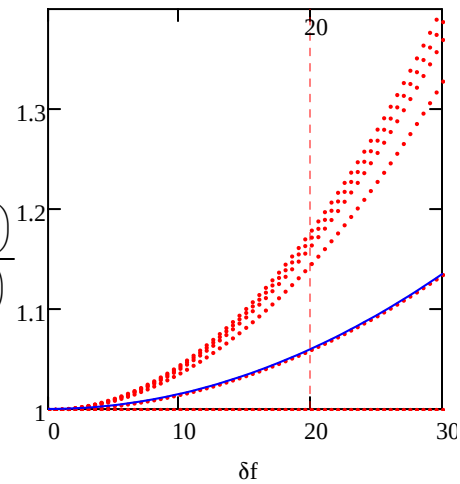

BCS resiistance estimate:

$f := 0.65 \cdot 10^9 \qquad T_c := 2\ K$

$$R_{BCS} := \frac{2 \cdot 10^{-4}}{T_c} \cdot \left(\frac{f}{1.5 \cdot 10^9}\right)^2 \cdot \exp\left(\frac{-17.67}{T_c}\right)$$

$R_{BCS} = 2.733 \times 10^{-9}\ \Omega$

Flight factors

$$\kappa_f(\beta, \beta_w, n_{cell}) := \frac{2 \cdot \beta}{\pi \cdot n_{cell}} \cdot \left[\frac{\sin\left(\frac{\beta - \beta_w}{\beta} \cdot \frac{\pi \cdot n_{cell}}{2}\right)}{\beta - \beta_w} + (-1)^{n_{cell}+1} \cdot \frac{\sin\left(\frac{\beta + \beta_w}{\beta} \cdot \frac{\pi \cdot n_{cell}}{2}\right)}{\beta + \beta_w}\right] \cdot \left[0.9599 \cdot (n_{cell} < 3) + 0.9939 \cdot (n_{cell} > 3)\right]$$

$ic1 := 1..5$ $\qquad \kappa f_{ic1} := \kappa_f\left(\beta g_{ic1} + 10^{-8}, \beta g_{ic1}, n_{cell_{ic1}}\right)$

Cavity filling time for operation in pulsed regime

Decay time for stored energy: $\tau_d := \dfrac{Q_L}{2\cdot\pi\cdot f_c}$

Filling time: $\tau_{fill} := 2\cdot\ln(2)\cdot\tau_d$

$$\tau_d\cdot 10^3 = \begin{pmatrix} 0.0052 \\ 2.6512 \\ 1.8371 \\ 2.8557 \\ 2.7696 \\ 2.817 \end{pmatrix} \text{ms} \qquad \tau_{fill}\cdot 10^3 = \begin{pmatrix} 0.0071 \\ 3.6753 \\ 2.5468 \\ 3.9588 \\ 3.8395 \\ 3.9051 \end{pmatrix} \text{ms}$$

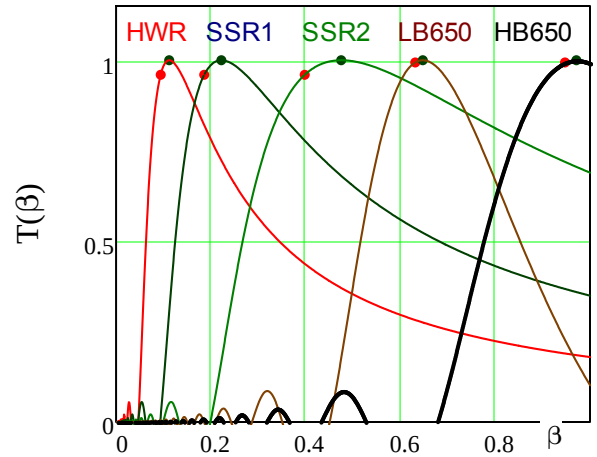

Real part of optimal beam current in the abcence of detuning

$$Re_I_{opt_{ic}} := \frac{\beta_{cpl_{ic}} - 1}{R_Q_{ic}\cdot Q_{0_{ic}}}\cdot U_{max_{ic}} \qquad Re_I_{opt}\cdot 10^3 = \begin{pmatrix} 0 \\ 2.684 \\ 2.255 \\ 2.875 \\ 2.788 \\ 2.833 \end{pmatrix} \text{mA}$$

$$\left(\frac{P_r}{I_{linac}\cdot U_{max}}\right) = \begin{pmatrix} 9.44 \\ 1.172 \\ 1.065 \\ 1.22 \\ 1.198 \\ 1.209 \end{pmatrix} \qquad \frac{Re_I_{opt}}{I_{linac}} = \begin{pmatrix} 0 \\ 1.342 \\ 1.128 \\ 1.438 \\ 1.394 \\ 1.417 \end{pmatrix}$$

Cryogenic power

$$P_{cav} := \frac{\left(\overrightarrow{U_{max}}\right)^2}{R_Q \cdot Q_0} \qquad P_{crm_{ic}} := P_{cav_{ic}} \cdot M_{12,ic} \qquad P_{TotPerCrm_{ic}} := M_{14,ic} + P_{crm_{ic}} \qquad P_{cav} = \begin{pmatrix} 1888.007 \\ 2.909 \\ 2.894 \\ 10.467 \\ 17.471 \\ 21.64 \end{pmatrix} W \qquad P_{crm} = \begin{pmatrix} 1888.007 \\ 23.273 \\ 23.154 \\ 52.336 \\ 52.413 \\ 129.839 \end{pmatrix} W$$

$$P_{StatTot} := \sum_{ic=1}^{5} \left(M_{14,ic} \cdot M_{13,ic}\right) \qquad P_{DynTotCW} := \sum_{ic=1}^{5} \left(P_{crm_{ic}} \cdot M_{13,ic}\right)$$

$$P_{CryoTotCW} := P_{StatTot} + P_{DynTotCW} \qquad P_{StatTot} = 145.9 \ W \qquad P_{DynTotCW} = 1531.83 \ W \qquad P_{CryoTotCW} = 1677.73 \ W$$

$$P_{TotPerCrm} = \begin{pmatrix} 1.888 \times 10^3 \\ 37.273 \\ 35.154 \\ 61.136 \\ 54.913 \\ 134.539 \end{pmatrix} W$$

Total static loads to 5 and 70 K

$$P_{StatTot5K} := \sum_{ic=1}^{5} \left(M_{19,ic} \cdot M_{13,ic}\right) = 714.3 \ W \qquad P_{StatTot70K} := \sum_{ic=1}^{5} \left(M_{20,ic} \cdot M_{13,ic}\right) = 2828.3 \ W$$

Pulsed operation

$$\int_0^{2 \cdot \ln(2) \cdot \tau} \left[2 \cdot \left(1 - \exp\left(-\frac{t}{2 \cdot \tau}\right)\right)\right]^2 dt = \tau \cdot (\ln(256) - 5) \quad \Rightarrow \quad F_{cryo} := \frac{\ln(256) - 5}{2 \cdot \ln(2)} = 0.393$$

Accelerated cavity discharge:

$$E_{discharge}(t, \tau) := \exp\left(-\frac{t}{2 \cdot \tau}\right) - 2 \cdot \left(1 - \exp\left(-\frac{t}{2 \cdot \tau}\right)\right) \qquad F_{dschg} := \int_0^{0.81094} E_{discharge}(t, 1)^2 \, dt = 0.244$$

$$\eta_{cryo} := \left(\tau_{fill} \cdot F_{cryo} + F_{dschg} \cdot \tau_d \cdot 0.81094 + T_{inj}\right) \cdot f_{rep}$$

$$P_{CryoTotDynamic} := P_{crm_1} \cdot M_{13,1} + \sum_{ic=2}^{5} \left(\eta_{cryo_{ic}} \cdot P_{crm_{ic}} \cdot M_{13,ic}\right) = 102.071 \ W$$

$$P_{CryoTotPulsed} := P_{StatTot} + P_{CryoTotDynamic} = 247.971 \ W$$

$$\sum_{ic=2}^{5} \left(\eta_{cryo_{ic}} \cdot P_{crm_{ic}} \cdot M_{13,ic}\right) = 78.798 \ W$$

$$\eta_{cryo} = \begin{pmatrix} 1.104 \\ 5.035 \\ 3.825 \\ 5.338 \\ 5.211 \\ 5.281 \end{pmatrix} \cdot \%$$

$\eta_{cryo_{ic}} \cdot P_{crm_{ic}} =$

20.837
1.172
0.886
2.794
2.731
6.857

$\frac{W}{crm}$

Normal cavity discharge:

$$F_{dschgN} = \frac{1}{\tau_d} \cdot \int_0^{\infty} \exp\left(-\frac{t}{2 \cdot \tau}\right)^2 dt \qquad F_{dschgN} := 1$$

$$\eta_{cryoN} := \left(\tau_{fill} \cdot F_{cryo} + F_{dschgN} \cdot \tau_d + T_{inj}\right) \cdot f_{rep}$$

$$\left(\tau_{fill} + \tau_d \cdot 0.81094 + T_{inj}\right) \cdot f_{rep} = \begin{pmatrix} 0.011 \\ 0.127 \\ 0.092 \\ 0.136 \\ 0.133 \\ 0.135 \end{pmatrix}$$

$$P_{CryoTotDynamicN} := P_{crm_1} \cdot M_{13,1} + \sum_{ic=2}^{5} \left(\eta_{cryoN_{ic}} \cdot P_{crm_{ic}} \cdot M_{13,ic}\right) = 169.325 \ W$$

$$P_{CryoTotPulsedN} := P_{StatTot} + P_{CryoTotDynamicN} = 315.225 \ W$$

$$\sum_{ic=1}^{5} \left(\eta_{cryoN_{ic}} \cdot P_{crm_{ic}} \cdot M_{13,ic}\right) = 148.214 \ W$$

$$\frac{\sum_{ic=1}^{5} \left(\eta_{cryo_{ic}} \cdot P_{crm_{ic}} \cdot M_{13,ic}\right)}{\sum_{ic=1}^{5} \left(\eta_{cryoN_{ic}} \cdot P_{crm_{ic}} \cdot M_{13,ic}\right)} = 0.54$$

$$\left(\tau_{fill} + T_{inj}\right) \cdot f_{rep} = \begin{pmatrix} 0.011 \\ 0.084 \\ 0.062 \\ 0.09 \\ 0.088 \\ 0.089 \end{pmatrix}$$

$$\eta_{cryoN} = \begin{pmatrix} 1.112 \\ 9.289 \\ 6.773 \\ 9.921 \\ 9.655 \\ 9.801 \end{pmatrix} \cdot \%$$

$\eta_{cryoN_{ic}} \cdot P_{crm_{ic}} =$

20.993
2.162
1.568
5.192
5.06
12.726

$\frac{W}{crm}$

$$\frac{P_{CryoTotPulsedN}}{P_{CryoTotPulsed}} = 1.271 \qquad \frac{P_{CryoTotPulsedN}}{P_{CryoTotCW}} = 0.188$$

Required thickness of linac collimators

Collimator material steel => $\rho_{st} := 7.8$ g/cm^3 $\quad dE_dx_0 := 1.45\cdot 10^6$ eV/(g/cm^2) $\quad \lambda_T := 81.7$ g/cm^2

Stopping length: $$x(E) := \frac{E^2}{(E + m_p)\cdot dE_dx_0\cdot \rho_{st}}$$

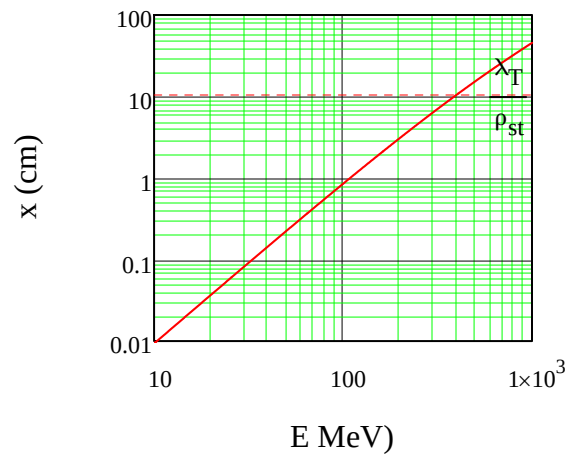

Simple estimate of beam acceleration

$E_0 := 2.1\cdot 10^6$ eV

$$EnD(E_0) := \left|\begin{array}{l}
i \leftarrow 0 \\
Ncrm \leftarrow 0 \\
E_0 \leftarrow E_0 \\
\text{for } ic \in 1..5 \\
\quad \text{for } ncrm \in 0..M_{13,ic} - 1 \\
\quad\quad \text{for } ncav \in 0..M_{12,ic} - 1 \\
\quad\quad\quad \left|\begin{array}{l}
\beta_i \leftarrow \sqrt{1 - \dfrac{m_p^2}{(E_i + m_p)^2}} \\
\varphi_i \leftarrow 6 + \dfrac{65}{(i+1)^{0.344}} \\
\kappa f_i \leftarrow \kappa_f(\beta_i, \beta g_{ic}, n cell_{ic}) \\
E_{i+1} \leftarrow E_i + U max_{ic}\cdot \kappa f_i\cdot \cos\left(\dfrac{\pi}{180}\cdot\varphi_i\right) \\
\Delta E_i \leftarrow U max_{ic}\cdot \kappa f_i \\
i \leftarrow i + 1 \\
Ncrm_i \leftarrow ncrm + 1
\end{array}\right. \\
\beta_i \leftarrow \sqrt{1 - \dfrac{m_p^2}{(E_i + m_p)^2}} \\
\varphi_i \leftarrow \varphi_{i-1} \\
Ncrm_i \leftarrow Ncrm_{i-1} \\
\kappa f_i \leftarrow \kappa f_{i-1} \\
\Delta E_i \leftarrow \Delta E_{i-1} \\
augment(E, Ncrm, \kappa f, \beta, \varphi, \Delta E)
\end{array}\right.$$

$$N_{cav} := \sum_{ic=1}^{5} (M_{12,ic}\cdot M_{13,ic}) = 116 \qquad ncav := 0..N_{cav}$$

$$En := EnD(E_0)$$

$n_{end_0} := 0 \qquad n_{end_{ic+1}} := n_{end_{ic}} + M_{12,ic+1}\cdot M_{13,ic+1}$

$n_g := 59$

$\beta_g := En_{n_g,3}$

$n_{end_{ic}} =$	$En_{n_{end_{ic}},0}\cdot 10^{-6} =$	$En_{n_{end_{ic}},3} =$
0	2.1	0.067
8	11.658	0.156
24	38.633	0.278
59	184.995	0.55
92	517.07	0.764
116	800.624	0.842

MeV

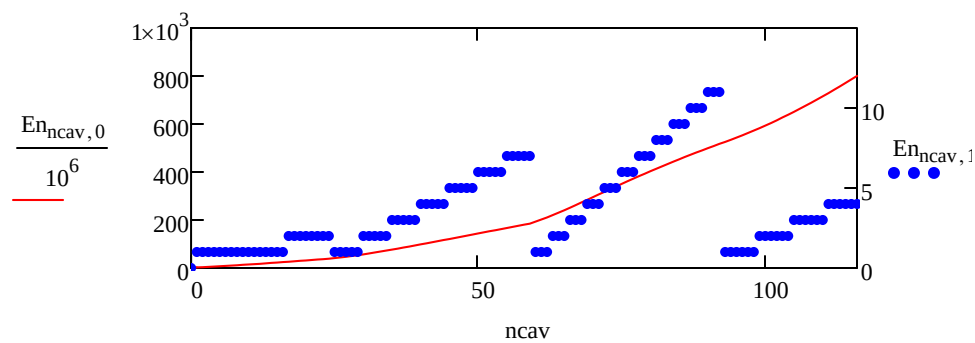

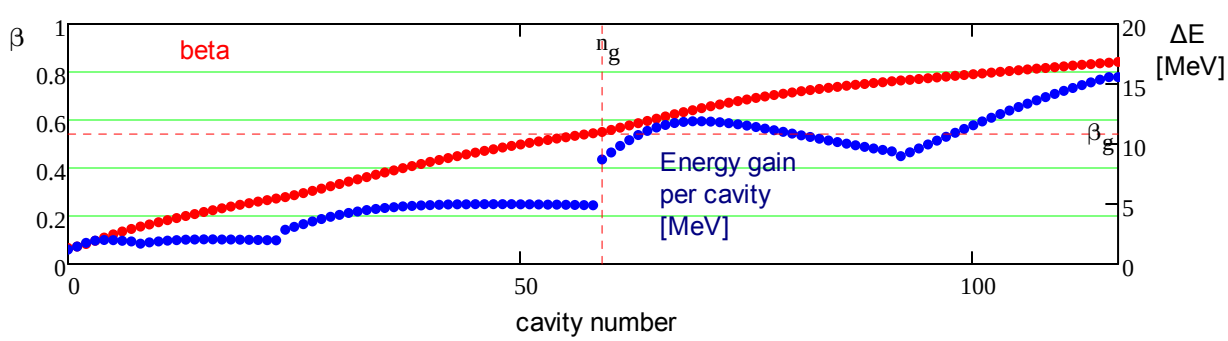

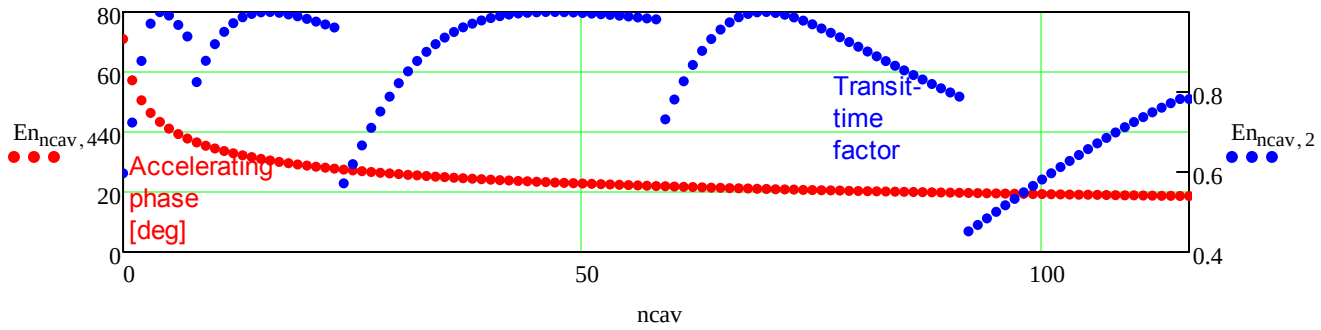
80
60
40
20
0
0
50
100
ncav
0.8
0.6
0.4
$En_{ncav,4}$
$En_{ncav,2}$
Accelerating
phase
[deg]
Transit-
time
factor

Booster

Circumference: $C := 47420.214$ cm

Injection energy: $E_{min} := 0.8 \cdot 10^9$ eV

$P_{min} := \sqrt{(E_{min} + m_p)^2 - m_p^2}$

$N_{ramp} := 512$

$ir := 0 .. N_{ramp}$

Injection momentum: $P_{min} = 1.463 \times 10^9$

Extraction energy: $E_{max} := 7.946 \cdot 10^9$ eV

$P_{max} := \sqrt{(E_{max} + m_p)^2 - m_p^2}$

Extraction momentum: $P_{max} = 8.835 \times 10^9$ eV

Ramp frequency: $f_{ramp} := f_{rep} = 20$ Hz

$t_{ir} := \frac{ir}{N_{ramp}} \cdot \frac{1}{2 \cdot f_{ramp}}$

Harmonic number $q_b := 84$

Momentum compaction: $\alpha := .03346$

$\gamma_t := \frac{1}{\sqrt{\alpha}}$

$P_{ir} := P_{min} + \frac{P_{max} - P_{min}}{2} \cdot \left(1 - \cos\left(2 \cdot \pi \cdot f_{ramp} \cdot t_{ir}\right)\right)$

Transition gamma: $\gamma_t = 5.467$

$E_{ir} := \sqrt{(P_{ir})^2 + m_p^2} - m_p$

$\gamma_{ir} := 1 + \frac{E_{ir}}{m_p}$

Hor norm. emittance: $\varepsilon_{nx95} := 0.0016$ cm

Vert norm. emittance: $\varepsilon_{ny95} := 0.0016$ cm

Hor effective norm. emit.: $\varepsilon_{nxEf} := 0.0005$ cm

Hor effective norm. emit.: $\varepsilon_{nyEf} := 0.0005$ cm

\ These two emittances are determined so that the beam density in the
| beam center obtained in the strip- injection simulations coinside with the
/ beam density of a Gaussian beam with these emittances

Minimum L. bucket size (total aria): $\varepsilon_{LB} := 0.075$ eV*s

$\varepsilon_{LB\sigma} := \frac{\varepsilon_{LB}}{5 \cdot \pi}$ - coefficient 1/5 is obtained from painting simulation by matching a bunching factor

RMS L. emittance(Δx Δp): $\varepsilon_{LB\sigma} = 4.775 \times 10^{-3}$ eV*s

$\beta_{ir} := \sqrt{1 - \frac{1}{(\gamma_{ir})^2}}$ $\quad f0_{ir} := \frac{c \cdot \beta_{ir}}{C}$ $\quad f_{RF_{ir}} := q_b \cdot f0_{ir}$

L. emit. jump at transition: $\kappa_{Ltr} := 15\%$

RF frequency at injection: $f_{RF_0} \cdot 10^{-6} = 44.705$ MHz

$Ks_{ir} := \frac{\alpha \cdot (\gamma_{ir})^2 - 1}{(\gamma_{ir})^2 - 1}$ $\quad \eta s_{ir} := \alpha - \frac{1}{(\gamma_{ir})^2}$

RF frequency at extraction: $f_{RF_{N_{ramp}}} \cdot 10^{-6} = 52.808$ MHz

Number of particles at injection: $N_{bi} := 6.7 \cdot 10^{12}$

$\varepsilon x_{ir} := \frac{\varepsilon_{nxEf}}{\beta_{ir} \cdot \gamma_{ir}}$ $\quad \varepsilon y_{ir} := \frac{\varepsilon_{nyEf}}{\beta_{ir} \cdot \gamma_{ir}}$ $\quad Ib_{ir} := e_{SI} \cdot N_{bi} \cdot f0_{ir}$

Booster efficiency in acceleration: $\kappa_b := 0.97$

Efficiency of Booster injection: $\kappa_{bi} := 0.98$

$N_{be} := N_{bi} \cdot \kappa_b$

Number of particles at extraction: $N_{be} = 6.499 \times 10^{12}$

$N_{turnB} := \frac{e_{SI} \cdot N_{bi} \cdot f0_0}{\kappa_{bi} \cdot I_{linac}}$ $\quad T_{inj} := \frac{N_{turnB}}{f0_0}$

Number of injection turns: $N_{turnB} = 291.462$

Injection time $T_{inj} \cdot 10^3 = 0.548$ ms

$ir := 0 .. N_{ramp} - 1$ $\quad Vacc_{ir} := \frac{E_{ir+1} - E_{ir}}{f0_{ir} \cdot (t_{ir+1} - t_{ir})}$

Number of bunches: $n_b := 81$

$N_{bb} := \frac{N_{bi}}{n_b}$

$Vacc_{N_{ramp}} := Vacc_{N_{ramp}-1}$

Bunch population at injection: $N_{bb} = 8.272 \times 10^{10}$

$P_B := e_{SI} \cdot N_{be} \cdot E_{max} \cdot f_{ramp}$

$ir := 0 .. N_{ramp}$

Beam power: $P_B \cdot 10^{-3} = 165.468$ kW

Injection beam current: $Ib_0 = 0.571$ A

$i_{trans} := \text{floor}\left(\frac{254}{512} \cdot N_{ramp}\right)$

Extraction beam current: $Ib_{N_{ramp}} \cdot \kappa_b = 0.655$ A

Booster acceptance: $\varepsilon_{accept} := 35 \cdot 10^{-4}$ cm

Normalized acceptance: $\varepsilon_{accept} \cdot \beta_0 \cdot \gamma_0 \cdot 10^4 = 54.585$

Booster aperture expressed in beam σ at injection: $\sqrt{\frac{6 \cdot \beta_0 \cdot \gamma_0 \cdot \varepsilon_{accept}}{\varepsilon_{ny95}}} = 4.524$ σ

$\Delta p_p_{inj} := \frac{P_{max} - P_{min}}{2 \cdot P_{min}} \cdot \left(1 - \cos\left(\pi \cdot f_{ramp} \cdot T_{inj}\right)\right) = 1.491 \times 10^{-3}$

Momentum change during injection:

Corresponding change in the Booster correctors:

Nunber of correctors: $N_{cor} := 48$ Transfer function for horizontal correctors: $\alpha_{corH} := 366$ G-cm/A

$$I_{cor} := \frac{2\cdot\pi\cdot P_{min}}{e_{conv}}\cdot\frac{\Delta p_p_{inj}}{N_{cor}\cdot\alpha_{corH}} \qquad I_{cor} = 2.603 \text{ A}$$

Note that the maximum corrector current is 40 A.

Optimal accelerator voltage:

$$V_{add} := (205\ \ 350.0\ \ 430.0\ \ 230.0\ \ 145.00\ \ 110.00\ \ 118.00\ \ 147.0\ \ 130.0\ \ 70.0\ \ 50.0)^T\cdot 10^3$$

$$t_{add} := (0.00\ \ 0.001\ \ 0.003\ \ 0.008\ \ 0.010\ \ 0.0115\ \ 0.0125\ \ 0.018\ \ 0.020\ \ 0.0245\ \ 0.025)^T \qquad vs := cspline(t_{add}, V_{add})$$

$$\Delta V_{ir} := interp(vs, t_{add}, V_{add}, t_{ir}) \qquad V0_{ir} := Vacc_{ir} + \Delta V_{ir} \qquad \phi 0_{ir} := asin\left(\frac{Vacc_{ir}}{V0_{ir}}\right) \qquad \nu_{s0_{ir}} := \sqrt{\frac{V0_{ir}\cdot q_b\cdot|Ks_{ir}|}{2\cdot\pi\cdot m_p\cdot\gamma_{ir}}}$$

$$\nu_{s_{ir}} := \nu_{s0_{ir}}\cdot\sqrt{\cos(\phi 0_{ir})}$$

$$\varepsilon_{Laccep_{ir}} := \frac{8}{\pi}\cdot\frac{m_p\cdot C}{c\cdot q_b\cdot\beta_{ir}}\cdot\sqrt{\frac{V0_{ir}\cdot\gamma_{ir}}{2\cdot\pi\cdot m_p\cdot q_b\cdot|Ks_{ir}|}}\cdot\frac{1-\sin(\phi 0_{ir})}{\left(1+0.5\cdot\sin(\phi 0_{ir})\right)^2} \qquad \Delta p_p_{max_{ir}} := \frac{2\cdot\nu_{s0_{ir}}}{q_b\cdot|\eta s_{ir}|}\cdot\sqrt{\cos(\phi 0_{ir}) - \left(\frac{\pi}{2}-\phi 0_{ir}\right)\cdot\sin(\phi 0_{ir})}$$

$$\Delta\Phi(\phi) := 2\cdot\pi - 1.36698\cdot\phi - 3.3\cdot\sqrt{\phi} + 0.208\cdot\phi\cdot\left(\frac{\pi}{2}-\phi\right) \qquad \Delta\phi_{ir} := \Delta\Phi(\phi 0_{ir}) \qquad \phi 0a_{ir} := \phi 0_{ir}\cdot(Ks_{ir} < 0) + (\pi - \phi 0_{ir})\cdot(Ks_{ir} \ge 0)$$

$$\sigma_{\varphi_{ir}} := q_b\cdot\sqrt{\frac{2\cdot\pi\cdot\varepsilon_{LB\sigma}\cdot c\cdot|\eta s_{ir}|}{m_p\cdot C\cdot\beta_{ir}\cdot\gamma_{ir}\cdot\nu_{s_{ir}}}\cdot\left[1+\kappa_{Ltr}\cdot(Ks_{ir}\ge 0)\right]} \qquad \sigma_{p_{ir}} := \sqrt{\frac{2\cdot\pi\cdot\varepsilon_{LB\sigma}\cdot c\cdot\nu_{s_{ir}}}{m_p\cdot C\cdot\beta_{ir}\cdot\gamma_{ir}\cdot|\eta s_{ir}|}\cdot\left[1+\kappa_{Ltr}\cdot(Ks_{ir}\ge 0)\right]} \qquad B_{ir} := \frac{\sqrt{2\cdot\pi}}{\sigma_{\varphi_{ir}}}$$

Ring Twiss parameters

$M :=$ BoosterTwiss.dat $\qquad N := rows(M) \qquad i := 0..N-1 \qquad N = 2.946\times 10^3$

$$s_i := M_{i,2} \qquad \beta x_i := M_{i,3} \qquad \beta y_i := M_{i,5} \qquad Dx_i := M_{i,7} \qquad \nu x_i := M_{i,11} \qquad \nu y_i := M_{i,12}$$

$$\alpha x_i := M_{i,4} \qquad \alpha y_i := M_{i,6} \qquad Dxp_i := M_{i,8} \qquad \nu_x := \nu x_{N-1} \qquad \nu_y := \nu y_{N-1} \qquad \nu_x = 6.725 \qquad \nu_y = 6.798$$

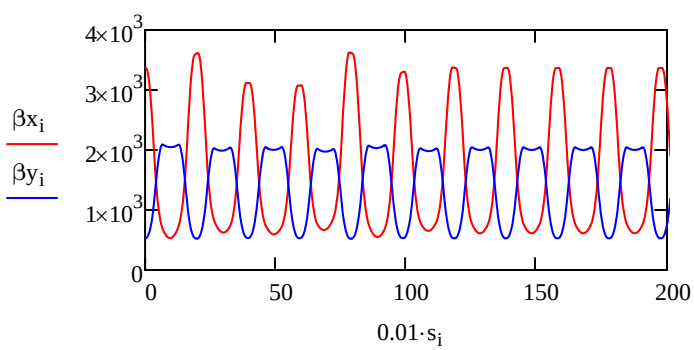

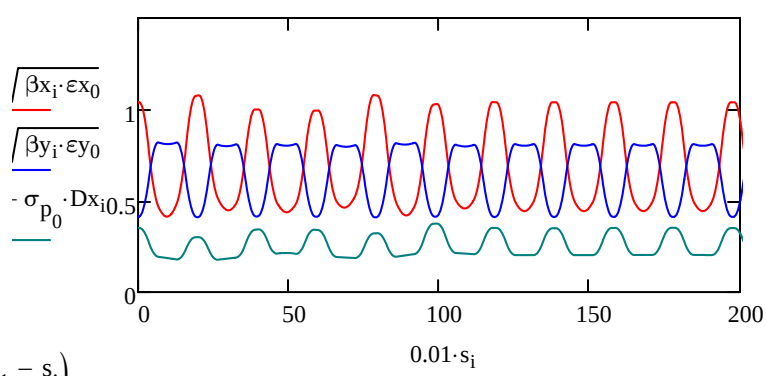

$$\delta\nu_{ySC_{ir}} := \frac{r_p\cdot N_{bi}\cdot B_{ir}}{2\cdot\pi\cdot(\beta_{ir})^2\cdot(\gamma_{ir})^3\cdot C}\cdot\sum_{j=0}^{N-2}\frac{\beta y_j\cdot(s_{j+1}-s_j)}{\sqrt{\beta y_j\cdot\varepsilon y_{ir}}\cdot\left[\sqrt{\beta x_j\cdot\varepsilon x_{ir}+(\sigma_{p_{ir}}\cdot Dx_j)^2}+\sqrt{\beta y_j\cdot\varepsilon y_{ir}}\right]}$$

$$\delta\nu_{xSC_{ir}} := \frac{r_p\cdot N_{bi}\cdot B_{ir}}{2\cdot\pi\cdot(\beta_{ir})^2\cdot(\gamma_{ir})^3\cdot C}\cdot\sum_{j=0}^{N-2}\frac{\beta x_j\cdot(s_{j+1}-s_j)}{\sqrt{\beta x_j\cdot\varepsilon x_{ir}+(\sigma_{p_{ir}}\cdot Dx_j)^2}\cdot\left[\sqrt{\beta x_j\cdot\varepsilon x_{ir}+(\sigma_{p_{ir}}\cdot Dx_j)^2}+\sqrt{\beta y_j\cdot\varepsilon y_{ir}}\right]}$$

MI 100% L. acceptance for slip-stacking: $\varepsilon_{Lmax} := 0.105$ eV s

- It implies the bucket of 4.1 ns, 6.1*20/15 MeV: $(\pi\cdot 6.1\cdot\frac{20}{15}\cdot 4.1\cdot 10^{-3} = 0.105)$

Maxumum RF voltage: $\max(V0)\cdot 10^{-3} = 857.038$ kV

Maximum H. SC tune shift for Gaussian tr. distribution: $\max(\delta\nu_{xSC}) = 0.149$

Maximum V. SC tune shift for Gaussian tr. distribution: $\max(\delta\nu_{ySC}) = 0.161$

Maximum H. SC tune shift for KV tr. distribution: $3^{-1}\cdot\max(\delta\nu_{xSC}) = 0.05$

Maximum V. SC tune shift for KV tr. distribution: $3^{-1}\cdot\max(\delta\nu_{ySC}) = 0.054$

- It implies the same 100% emittance as 95% emittance for the Gaussian transverse distribution

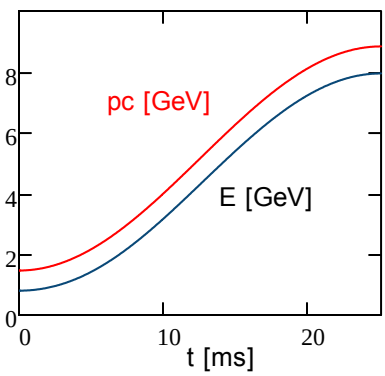

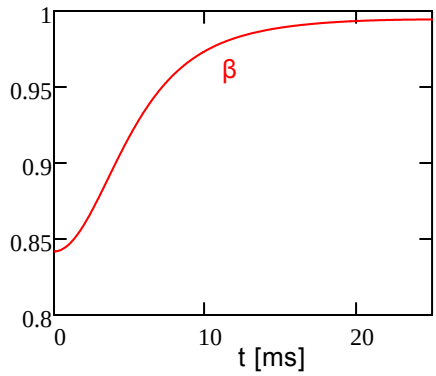

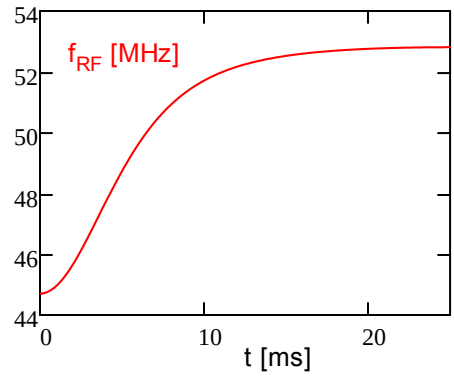

RF voltage

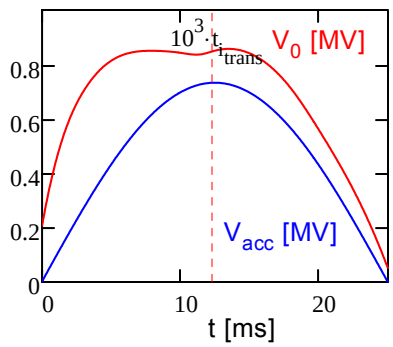

Accelerating phase, deg

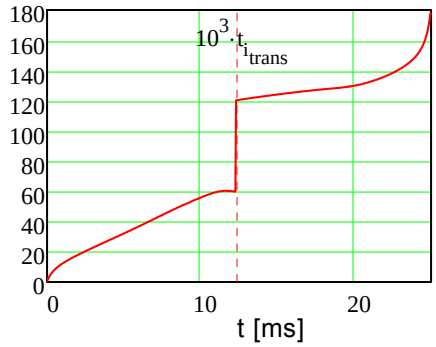

Bucket area, eV s

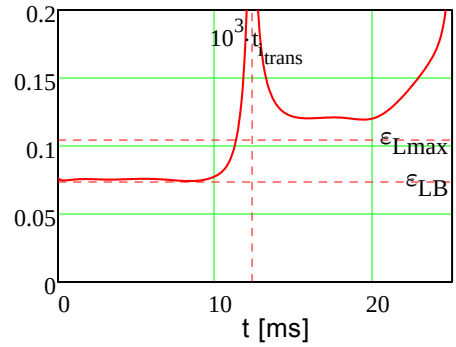

Bucket height, ΔP/P

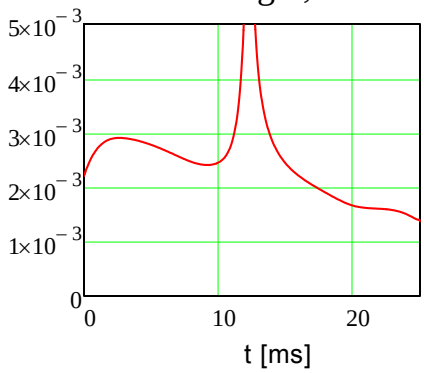

Bucket length, deg

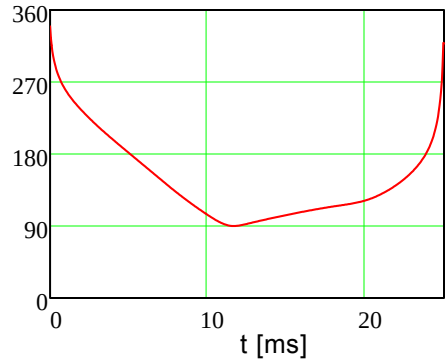

Synchrotron tune

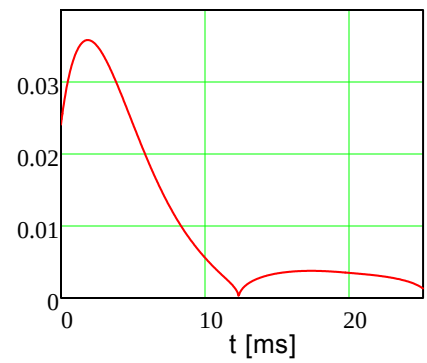

Rms ΔP/P

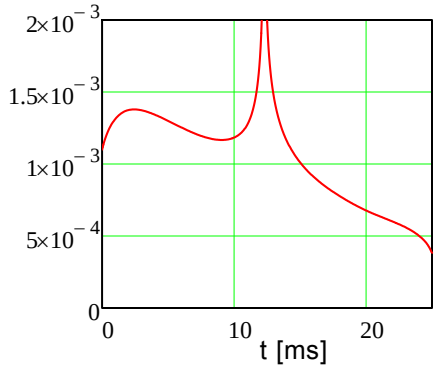

Rms bunch length, deg

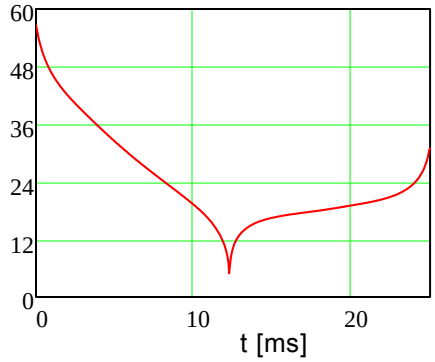

Bunching factor

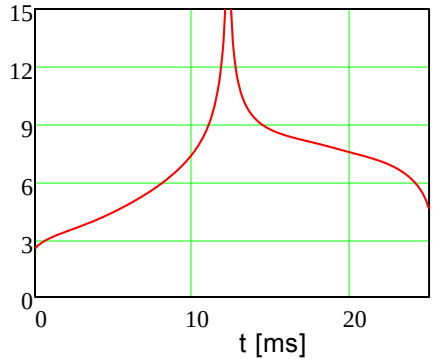

$\Sigma\nu_{s_0} := 0 \qquad \Sigma\nu_{s_{ir+1}} := \Sigma\nu_{s_{ir}} + f0_{ir}\cdot\nu_{s_{ir}}\cdot\left(t_1 - t_0\right)$

Space charge tune shifts

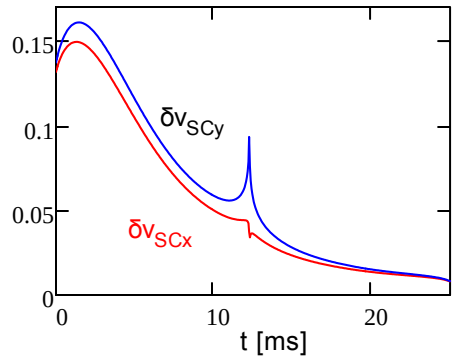

Number of syncrotron periods

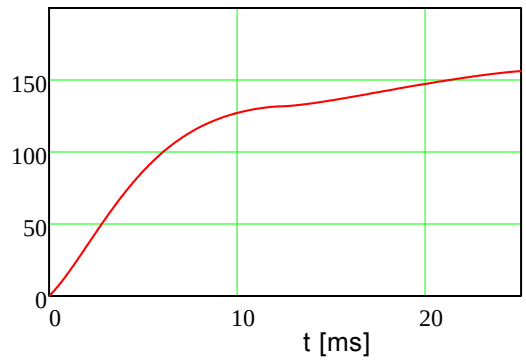

Cavity parameters

Number of cavities: $N_{cav} := 20$

External Q-value: $Q_{ext} := 600$

$$R_Q(f) := 75 + 75\cdot\left[0.8\cdot\frac{f - 37\cdot10^6}{(53-37)\cdot10^6} + 0.2\cdot\left[\frac{f - 37\cdot10^6}{(53-37)\cdot10^6}\right]^2\right] \qquad Q(f) := 300 + 800\cdot\left[\frac{f - 37\cdot10^6}{(53-37)\cdot10^6}\cdot0.5 + \left[\frac{f - 37\cdot10^6}{(53-37)\cdot10^6}\right]^2\cdot0.5\right]$$

$$R_{sh}(f) := Q(f)\cdot R_Q(f) \qquad R_{sht}(f) := \frac{Q(f)\cdot Q_{ext}}{Q(f) + Q_{ext}}\cdot R_Q(f) \qquad P_{cav_{ir}} := \frac{1}{R_{sh}\left(f_{RF_{ir}}\right)}\cdot\left(\frac{V0_{ir}}{N_{cav}}\right)^2 \qquad P_{acc_{ir}} := \frac{Vacc_{ir}}{N_{cav}}\cdot Ib_{ir}$$

Q

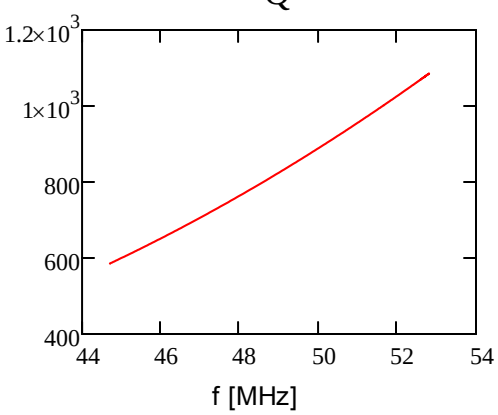

Data recieved from John Reid

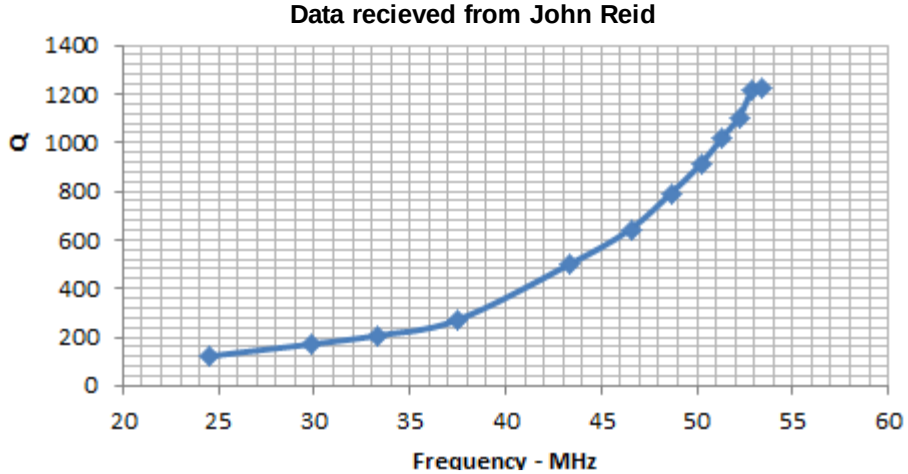

R/Q, Ω

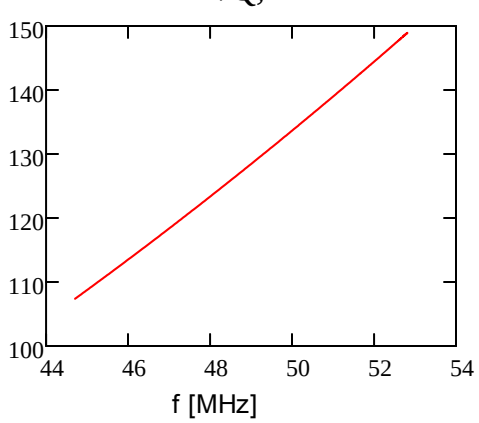

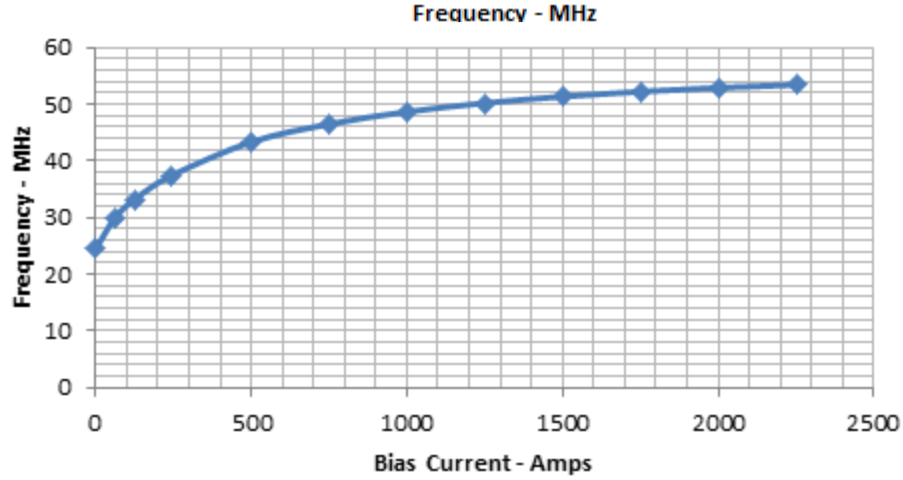

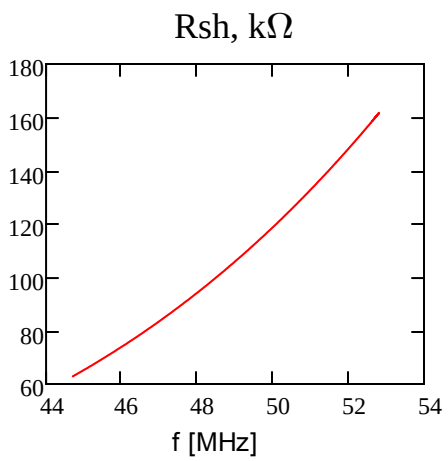
Rsh, kΩ
180
160
140
120
100
80
60
44
46
48
50
52
54
f [MHz]

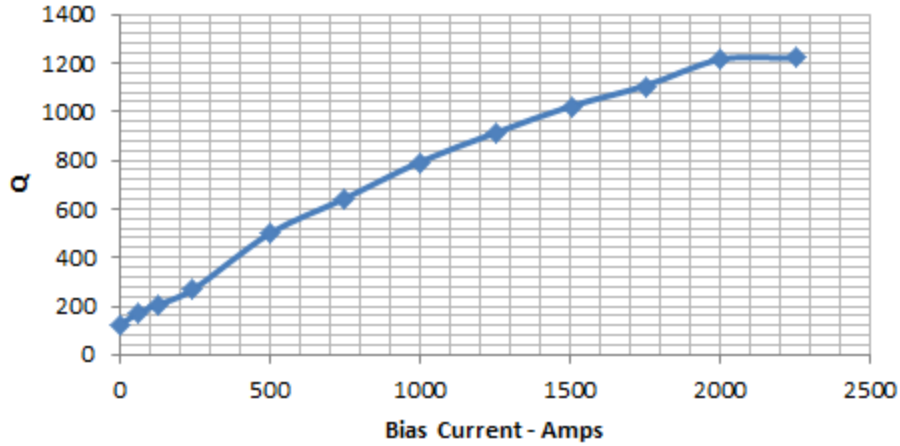
1400
1200
1000
800
600
400
200
0
Q
0
500
1000
1500
2000
2500
Bias Current - Amps

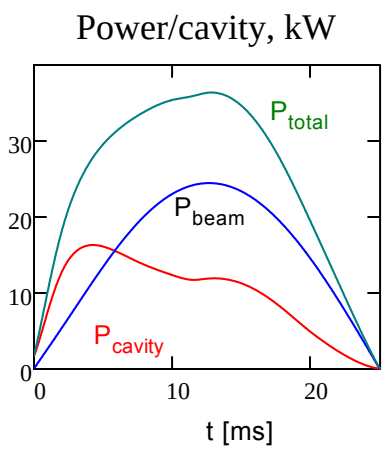
Power/cavity, kW
P total
P beam
P cavity
30
20
10
0
0
10
20
t [ms]

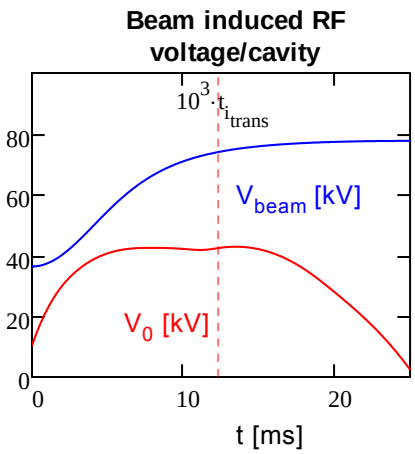
Beam induced RF voltage/cavity
10^3 · t_i trans
V beam [kV]
V 0 [kV]
80
60
40
20
0
0
10
20
t [ms]

Recycler / Main Injector

Number of slip-stacked batches: $n_{injMI} := 12$

Number of other Booster cycles in the MI cycle: $n_{others} := 12$

$E_R := E_{max}$ $\quad pc_R := P_{max}$ $\quad T_{MI} := \frac{n_{injMI} + n_{others}}{f_{ramp}}$

Injection energy: $E_R = 7.946 \times 10^9$ eV

Top energy: $E_{MI} := 118.765 \cdot 10^9$ eV

$pc_{MI} := \sqrt{\left(E_{MI} + m_p\right)^2 - m_p^{\ 2}}$

Injection Momentum: $pc_R = 8.835 \times 10^9$ eV

Top momentum: $pc_{MI} \cdot 10^{-9} = 119.7$ eV

Main Injector cycle duration: $T_{MI} = 1.2$ s

Number of particles at injection: $N_{be} \cdot n_{injMI} = 7.799 \times 10^{13}$

MI efficiency: $\kappa_{MI} := 0.97$

Number of particles at extraction: $N_{MI} = 7.565 \times 10^{13}$

$N_{MI} := N_{be} \cdot n_{injMI} \cdot \kappa_{MI}$ $\quad P_{MI} := \frac{e_{SI} \cdot N_{MI} \cdot E_{MI}}{T_{MI}}$

Beam power: $P_{MI} \cdot 10^{-6} = 1.199$ MW

Longitudinal 97% emittance of single slip-stacked bunch: $\varepsilon_{Lmax} = 0.105$ eV s

$C_{MI} := 7 \cdot C$

MI circumference: $C_{MI} \cdot 0.01 = 3319.415$ m

Transverse emittance delution at Booster-Recycler transfer: $\kappa_{\varepsilon 1} := 10\%$

Transverse emittance delution at Recycler-MI transfer: $\kappa_{\varepsilon 2} := 10\%$

Recycler

Harmonic number: $q_R := 588$ $\quad f0_R := \frac{c \cdot \beta_{N_{ramp}}}{C_{MI}}$ $\quad f_{RF_R} := q_R \cdot f0_R$

Momentum compaction: $\alpha_R := .002508$

Slip factor: $\eta_R = -8.645 \times 10^{-3}$ $\quad \eta_R := \alpha_R - \frac{1}{\left(\gamma_{N_{ramp}}\right)^2}$ $\quad K_R := \frac{\alpha_R \cdot \left(\gamma_{N_{ramp}}\right)^2 - 1}{\left(\gamma_{N_{ramp}}\right)^2 - 1}$

Revolution frequency: $f0_R \cdot 10^{-3} = 89.81$ kHz

RF frequency: $f_{RF_R} \cdot 10^{-6} = 52.808$ MHz $\quad \Delta f_{slip} := f_{ramp} \cdot q_b$ $\quad \Delta p_{slip} := \frac{\Delta f_{slip}}{|\eta_R| \cdot f_{RF_R}}$

RF frequency difference between slip-stacked trains: $\Delta f_{slip} = 1.68 \times 10^3$ Hz

Rel momentum difference between slip-stacked trains: $\Delta p_{slip} = 3.68 \times 10^{-3}$ $\quad \varepsilon_{LR\sigma} := \varepsilon_{LB\sigma} \cdot \left(1 + \kappa_{Ltr}\right)$

<u>Beam and RF parameters before bunch coalescing (single not-slip-stacked bunch)</u>

RF voltage: $V0_R := 125.6 \cdot 10^3 V$ $\quad \nu_{sR} := \sqrt{\frac{V0_R \cdot q_R \cdot |K_R|}{2 \cdot \pi \cdot m_p \cdot \gamma_{N_{ramp}}}}$ $\quad \Delta p_p_{maxR} := \frac{2 \cdot \nu_{sR}}{q_R \cdot |\eta_R|}$

Sinchrotron tune: $\nu_{sR} = 3.401 \times 10^{-3}$

RF bucket hight: $\Delta p_p_{maxR} = 1.338 \times 10^{-3}$ $\quad \varepsilon_{LaccepR} := \frac{8}{\pi} \cdot \frac{m_p \cdot C_{MI}}{c \cdot q_R \cdot \beta_{N_{ramp}}} \cdot \sqrt{\frac{V0_R \cdot \gamma_{N_{ramp}}}{2 \cdot \pi \cdot m_p \cdot q_R \cdot |K_R|}}$

RF bucket area: $\varepsilon_{LaccepR} = 0.283$ eV s

Rms longitudinal emittance: $\varepsilon_{LR\sigma} = 5.491 \times 10^{-3}$ eV s $\quad \sigma_{\varphi R} := q_R \cdot \sqrt{\frac{2 \cdot \pi \cdot \varepsilon_{LR\sigma} \cdot c \cdot |\eta_R|}{m_p \cdot C_{MI} \cdot \beta_{N_{ramp}} \cdot \gamma_{N_{ramp}} \cdot \nu_{sR}}}$

Rms bunch length: $\sigma_{\varphi R} = 31.899 \cdot deg$

Rms rel. momentum spread: $\sigma_{pR} = 3.725 \times 10^{-4}$ $\quad \sigma_{pR} := \sqrt{\frac{2 \cdot \pi \cdot \varepsilon_{LR\sigma} \cdot c \cdot \nu_{sR}}{m_p \cdot C_{MI} \cdot \beta_{N_{ramp}} \cdot \gamma_{N_{ramp}} \cdot |\eta_R|}}$ $\quad B_R := \frac{\sqrt{2 \cdot \pi}}{\sigma_{\varphi R}}$

Bunching factor: $B_R = 4.502$

3σ momentum spread: $3 \cdot P_{N_{ramp}} \cdot \sigma_{pR} \cdot 10^{-6} = 9.872$ MeV

3σ bunch length: $3 \cdot \frac{\sigma_{\varphi R}}{2 \cdot \pi} \cdot \frac{C_{MI}}{q_R} \cdot \frac{1}{\beta_{N_{ramp}} \cdot c} \cdot 10^9 = 5.034$ ns $\quad \varepsilon_{xR} := \varepsilon x_{N_{ramp}} \cdot \left(1 + \kappa_{\varepsilon 1}\right)$ $\quad \varepsilon_{yR} := \varepsilon y_{N_{ramp}} \cdot \left(1 + \kappa_{\varepsilon 1}\right)$

Bunching factor: $B_R = 4.502$

95% norm. hor. emittance: $6 \cdot \varepsilon_{xR} \cdot \beta_{N_{ramp}} \cdot \gamma_{N_{ramp}} \cdot 10^4 = 33$ mm mrad $\quad \varepsilon_{xR} \cdot 10^4 = 0.584$ mm mrad

95% norm. vert. emittance: $6 \cdot \varepsilon_{yR} \cdot \beta_{N_{ramp}} \cdot \gamma_{N_{ramp}} \cdot 10^4 = 33$ mm mrad $\quad \varepsilon_{yR} \cdot 10^4 = 0.584$ mm mrad

Ring Twiss parameters

MR := RecyclerTwiss.dat

$i := 0 .. rows(MR) - 1$ $\quad rows(MR) = 1.549 \times 10^4$

$s_i := MR_{i,2}$ $\quad \beta x_i := MR_{i,3}$ $\quad \beta y_i := MR_{i,5}$ $\quad Dx_i := MR_{i,7}$ $\quad \nu x_i := MR_{i,11}$ $\quad \nu y_i := MR_{i,12}$ $\quad \alpha x_i := MR_{i,4}$

$\alpha y_i := MR_{i,6}$ $\quad Dxp_i := MR_{i,8}$ $\quad \nu_x := \nu x_{rows(MR)-1}$ $\quad \nu_y := \nu y_{rows(MR)-1}$ $\quad \nu_x = 25.429$ $\quad \nu_y = 24.416$

$$\delta\nu_{ySC_R} := \frac{r_p \cdot (7 \cdot N_{be}) \cdot B_R}{2 \cdot \pi \cdot \left(\beta_{N_{ramp}}\right)^2 \cdot \left(\gamma_{N_{ramp}}\right)^3 \cdot C_{MI}} \cdot \sum_{j=0}^{rows(MR)-2} \frac{\beta y_j \cdot \left(s_{j+1} - s_j\right)}{\sqrt{\beta y_j \cdot \varepsilon_{yR}} \cdot \left[\sqrt{\beta x_j \cdot \varepsilon_{xR} + \left(\sigma_{pR} \cdot Dx_j\right)^2} + \sqrt{\beta y_j \cdot \varepsilon_{yR}}\right]}$$

$$\delta\nu_{xSC_R} := \frac{r_p \cdot (7 \cdot N_{be}) \cdot B_R}{2 \cdot \pi \cdot \left(\beta_{N_{ramp}}\right)^2 \cdot \left(\gamma_{N_{ramp}}\right)^3 \cdot C_{MI}} \cdot \sum_{j=0}^{rows(MR)-2} \frac{\beta x_j \cdot \left(s_{j+1} - s_j\right)}{\sqrt{\beta x_j \cdot \varepsilon_{xR} + \left(\sigma_{pR} \cdot Dx_j\right)^2} \cdot \left[\sqrt{\beta x_j \cdot \varepsilon_{xR} + \left(\sigma_{pR} \cdot Dx_j\right)^2} + \sqrt{\beta y_j \cdot \varepsilon_{yR}}\right]}$$

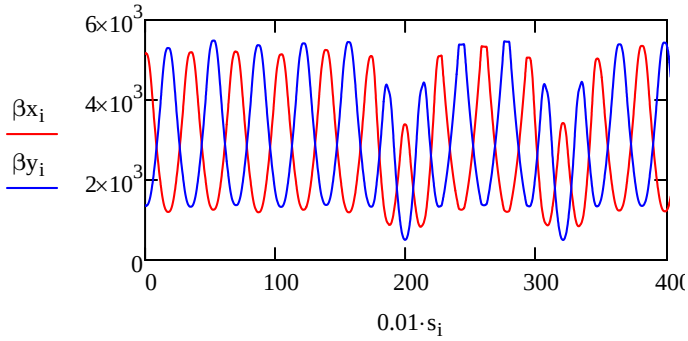

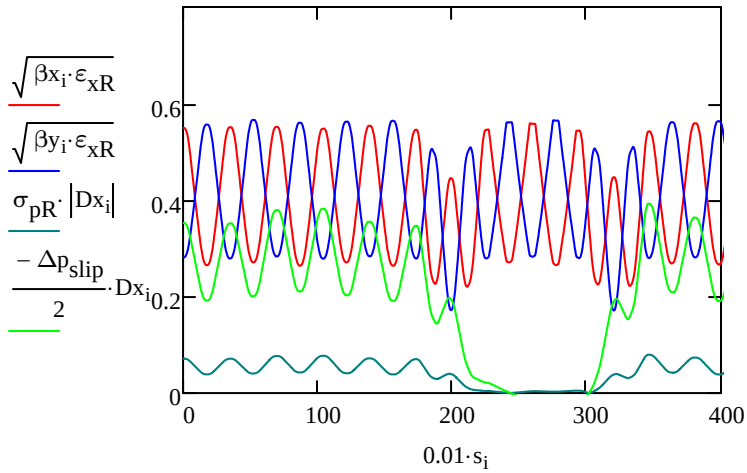

Maximum H. SC tune shift for Gaussian tr. distribution: $\delta\nu_{xSC_R} = 0.05$

Maximum V. SC tune shift for Gaussian tr. distribution: $\delta\nu_{ySC_R} = 0.052$

Maximum H. SC tune shift for KV tr. distribution: $3^{-1}\cdot\delta\nu_{xSC_R} = 0.017$

Maximum V. SC tune shift for KV tr. distribution: $3^{-1}\cdot\delta\nu_{ySC_R} = 0.017$

Main Injector

Ramp suggested for PIP-II

$\Delta T_r := (0.01\ \ 0.01\ \ 0.01\ \ 0.073\ \ 0.297\ \ 0.15\ \ 0.05\ \ 0.01\ \ 0.11\ \ 0.17\ \ 0.20\ \ 0.03\ \ 0.04\ \ 0.04\ \ .01)^T$ $\qquad Nk := \mathrm{rows}(\Delta T_r) - 1$

$P0_r := (8.888\ \ 8.888\ \ 8.99\ \ 9.56\ \ 22.0\ \ 86\ \ 116.1\ \ 120.888\ \ 120.888\ \ 104\ \ 60.0\ \ 11\ \ 6.4\ \ 7.799\ \ 8.888)^T$

$k := 0 .. Nk - 1 \quad T_{r_0} := 0 \qquad T_{r_{k+1}} := T_{r_k} + \Delta T_{r_k} \qquad N_{rMI} := 2048 \qquad ir := 0 .. N_{rMI} \qquad T_{r_{Nk}} = 1.2$

$t_{ir} := \frac{ir}{N_{rMI}} \cdot T_{r_{Nk}} \qquad vt := \mathrm{lspline}(T_r, P0_r) \qquad pc_{ir} := 10^9 \cdot \mathrm{interp}(vt, T_r, P0_r, t_{ir}) \qquad ir := 0 .. N_{rMI} - 1 \qquad dPdt_{ir} := \frac{pc_{ir+1} - pc_{ir}}{t_{ir+1} - t_{ir}}$

$t_{inj} := 0.01 \qquad t_{extr} := 0.605 \qquad ir_1 := \mathrm{floor}\left[N_{rMI} \cdot \frac{t_{inj}}{(T_{r_{Nk}})}\right] \qquad ir_2 := \mathrm{floor}\left[N_{rMI} \cdot \frac{t_{extr}}{(T_{r_{Nk}})}\right]$

$ir_1 = 17$

$ir_2 = 1032$

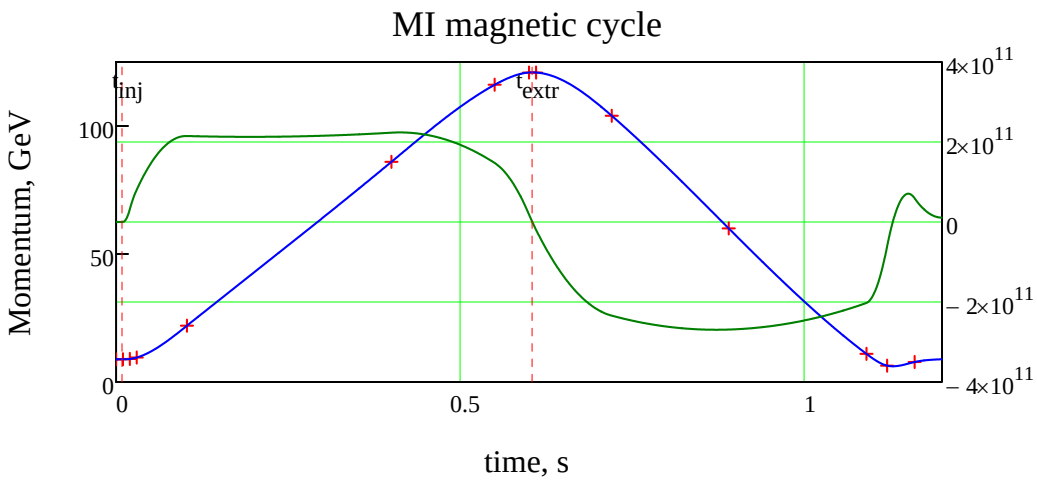

$ir := 0 .. ir_2$

$E_{mi_{ir}} := \sqrt{(pc_{ir})^2 + m_p^2} - m_p$

$E_{mi_{ir_1}} \cdot 10^{-9} = 7.999$ GeV

$E_{mi_{ir_2}} \cdot 10^{-9} = 120$ GeV

$\gamma_{mi_{ir}} := 1 + \frac{E_{mi_{ir}}}{m_p}$

Harmonic number: $q_{mi} := 588$

Slip factor: $\alpha_{mi} := .00214 \qquad \gamma_{tMI} := \frac{1}{\sqrt{\alpha_{mi}}} \qquad \beta_{mi_{ir}} := \sqrt{1 - \frac{1}{(\gamma_{mi_{ir}})^2}} \qquad f0_{mi_{ir}} := \frac{c \cdot \beta_{mi_{ir}}}{C_{MI}}$

Transition gamma: $\gamma_{tMI} = 21.617$

$f_{RFmi_{ir}} := q_{mi} \cdot f0_{mi_{ir}}$

RF frequency at injection: $f_{RFmi_{ir_1}} \cdot 10^{-6} = 52.812$ MHz

$K_{mi_{ir}} := \frac{\alpha_{mi} \cdot (\gamma_{mi_{ir}})^2 - 1}{(\gamma_{mi_{ir}})^2 - 1} \qquad \eta_{mi_{ir}} := \alpha_{mi} - \frac{1}{(\gamma_{mi_{ir}})^2}$

RF frequency at extraction: $f_{RFmi_{ir_2}} \cdot 10^{-6} = 53.104$ MHz

Minimum L. bucket size (total aria): $\varepsilon_{LBmi} := 0.8$ eV*s

$\varepsilon_{Lmi\sigma} := \frac{\varepsilon_{LBmi}}{6 \cdot \pi} \qquad \varepsilon_{xn95MI} := \varepsilon_{nx95} \cdot (1 + \kappa_{\varepsilon 1}) \cdot (1 + \kappa_{\varepsilon 2})$

RMS L. emittance(Δx Δp): $\varepsilon_{Lmi\sigma} = 0.042$ eV*s $\qquad \varepsilon_{yn95MI} := \varepsilon_{ny95} \cdot (1 + \kappa_{\varepsilon 1}) \cdot (1 + \kappa_{\varepsilon 2})$

L. emit. jump at transition: $\kappa_{Lmitr} := 30\%$

95% norm. hor.&vert.emittances: $\varepsilon_{xn95MI} \cdot 10^4 = 19.36$ mm mrad $\qquad \varepsilon_{yn95MI} \cdot 10^4 = 19.36$ mm mrad

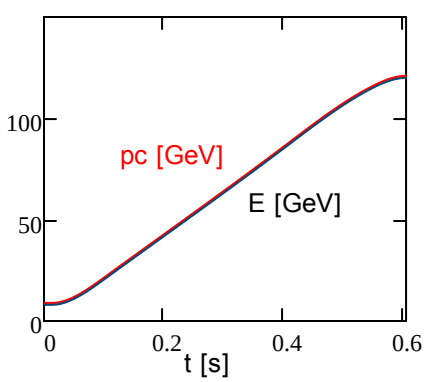

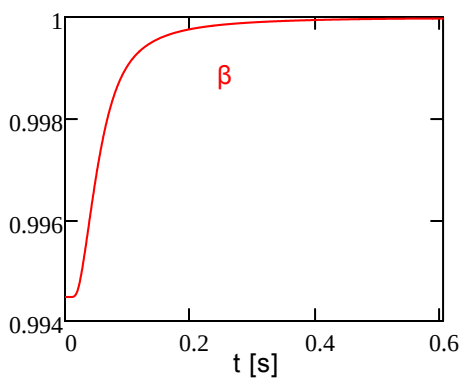

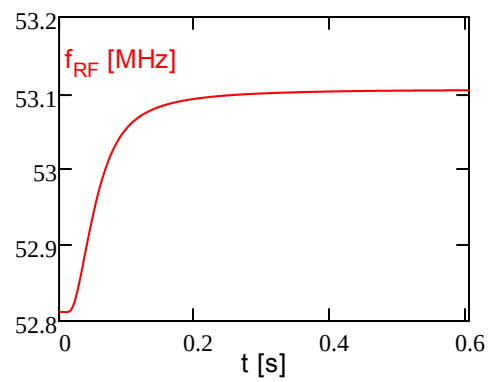

MI RF

$ir := 0 .. ir_2 - 1$ $\quad Va_{mi_{ir}} := \dfrac{E_{mi_{ir+1}} - E_{mi_{ir}}}{f0_{mi_{ir}} \cdot (t_{ir+1} - t_{ir})}$ $\quad Va_{mi_{ir_2}} := Va_{mi_{ir_2-1}}$ $\quad ir := 0 .. ir_2$

$V_{mi} := (1050 \;\; 1050.0 \;\; 1650 \;\; 1650.0 \;\; 800 \;\; 900 \;\; 1000 \;\; 890 \;\; 790 \;\; 680 \;\; 400)^T \cdot 10^3$

$t_{mi} := (0.00 \;\; 0.010 \;\; 0.0200 \;\; 0.050 \;\; 0.085 \;\; 0.1200 \;\; 0.20 \;\; 0.3 \;\; 0.4 \;\; 0.50 \;\; t_{extr})^T$ $\quad v_{mi} := pspline(t_{mi}, V_{mi})$

$\Delta V_{ir} := interp(v_{mi}, t_{mi}, V_{mi}, t_{ir})$ $\quad V0_{mi_{ir}} := Va_{mi_{ir}} + \Delta V_{ir}$ $\quad \phi0_{mi_{ir}} := asin\left(\dfrac{Va_{mi_{ir}}}{V0_{mi_{ir}}}\right)$ $\quad \nu_{s0mi_{ir}} := \sqrt{\dfrac{V0_{mi_{ir}} \cdot q_{mi} \cdot |K_{mi_{ir}}|}{2 \cdot \pi \cdot m_p \cdot \gamma_{mi_{ir}}}}$

$\varepsilon_{LtotMI_{ir}} := \dfrac{8}{\pi} \cdot \dfrac{m_p \cdot C_{MI}}{c \cdot q_{mi} \cdot \beta_{mi_{ir}}} \cdot \sqrt{\dfrac{V0_{mi_{ir}} \cdot \gamma_{mi_{ir}}}{2 \cdot \pi \cdot m_p \cdot q_{mi} \cdot |K_{mi_{ir}}|}} \cdot \dfrac{1 - \sin(\phi0_{mi_{ir}})}{(1 + 0.5 \cdot \sin(\phi0_{mi_{ir}}))^2}$ $\quad \nu_{smi_{ir}} := \nu_{s0mi_{ir}} \cdot \sqrt{\cos(\phi0_{mi_{ir}})}$

$\Delta\phi_{mi_{ir}} := \Delta\Phi(\phi0_{mi_{ir}})$

$\Delta p_p_{m_{ir}} := \dfrac{2 \cdot \nu_{s0mi_{ir}}}{q_{mi} \cdot |\eta_{mi_{ir}}|} \cdot \sqrt{\cos(\phi0_{mi_{ir}}) - \left(\dfrac{\pi}{2} - \phi0_{mi_{ir}}\right) \cdot \sin(\phi0_{mi_{ir}})}$ $\quad \phi0a_{mi_{ir}} := \phi0_{mi_{ir}} \cdot (K_{mi_{ir}} < 0) + (\pi - \phi0_{mi_{ir}}) \cdot (K_{mi_{ir}} \geq 0)$

$\sigma_{\varphi mi_{ir}} := q_{mi} \cdot \sqrt{\dfrac{2 \cdot \pi \cdot \varepsilon_{Lmi\sigma} \cdot c \cdot |\eta_{mi_{ir}}|}{m_p \cdot C_{MI} \cdot \beta_{mi_{ir}} \cdot \gamma_{mi_{ir}} \cdot \nu_{smi_{ir}}} \cdot \left[1 + \kappa_{Ltr} \cdot (K_{mi_{ir}} \geq 0)\right]}$ $\quad \sigma_{pmi_{ir}} := \sqrt{\dfrac{2 \cdot \pi \cdot \varepsilon_{Lmi\sigma} \cdot c \cdot \nu_{smi_{ir}}}{m_p \cdot C_{MI} \cdot \beta_{mi_{ir}} \cdot \gamma_{mi_{ir}} \cdot |\eta_{mi_{ir}}|} \cdot \left[1 + \kappa_{Ltr} \cdot (K_{mi_{ir}} \geq 0)\right]}$

$B_{mi_{ir}} := \dfrac{\sqrt{2 \cdot \pi}}{\sigma_{\varphi mi_{ir}}}$ $\quad i_{tr} := 162$ $\quad \Sigma\nu_{smi_0} := 0$ $\quad \Sigma\nu_{smi_{ir+1}} := \Sigma\nu_{smi_{ir}} + f0_{mi_{ir}} \cdot \nu_{smi_{ir}} \cdot (t_{ir+1} - t_{ir})$

RF voltage

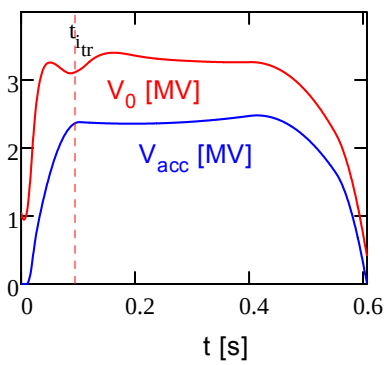

Accelerating phase, deg

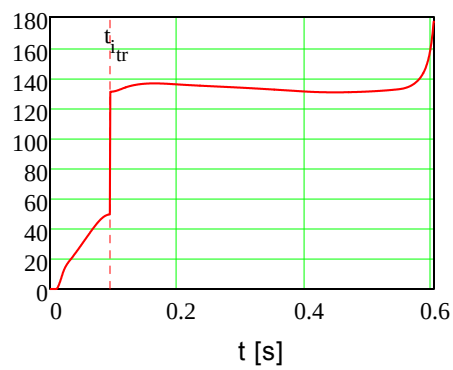

Bucket area, eV s

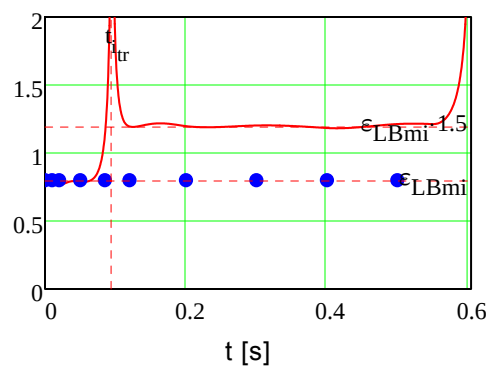

Bucket height, ΔP/P

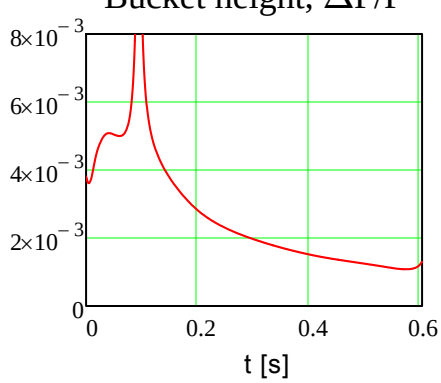

Bucket length, deg

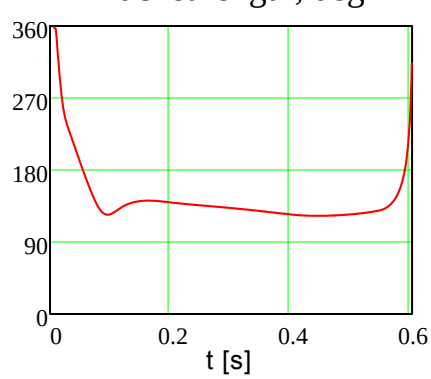

Synchrotron tune

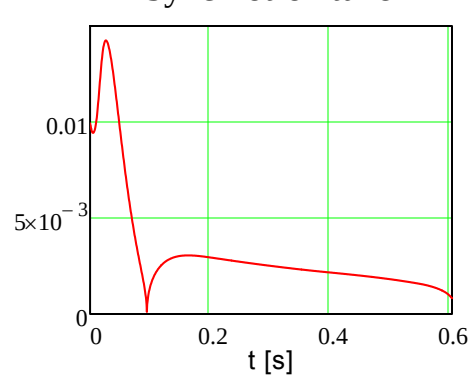

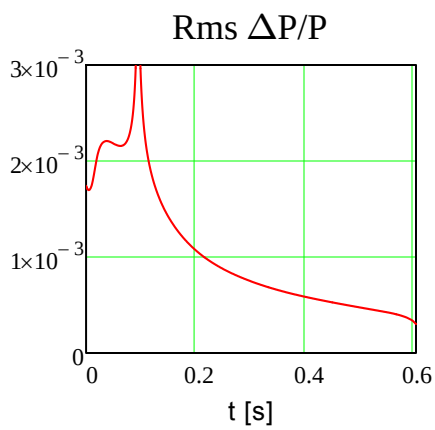

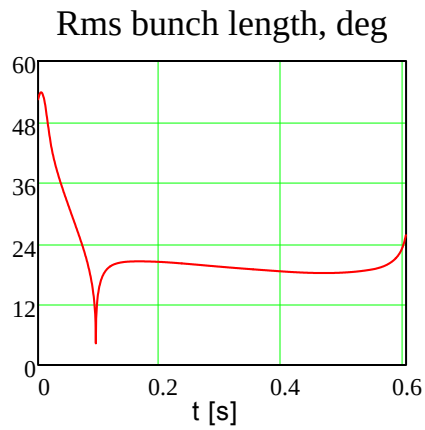

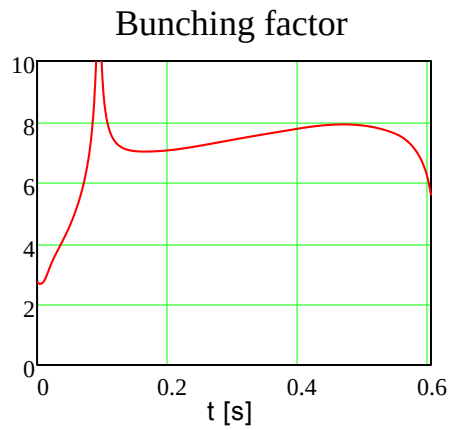

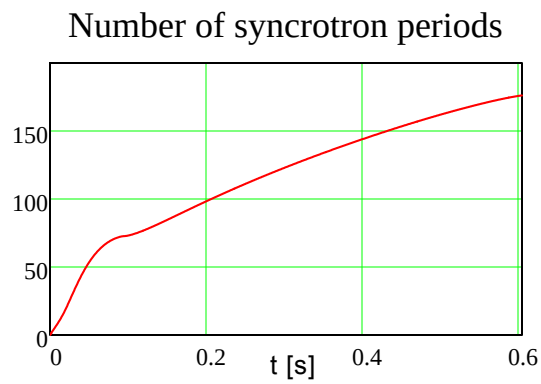

Ring Twiss parameters

$M :=$ MI_Twiss.dat $\quad N := \mathrm{rows}(M) \quad i := 0 .. N-1 \quad N = 1.017 \times 10^4$

$s_i := M_{i,2} \quad \beta x_i := M_{i,3} \quad \beta y_i := M_{i,5} \quad Dx_i := M_{i,7} \quad \nu x_i := M_{i,11} \quad \nu y_i := M_{i,12}$

$\alpha x_i := M_{i,4} \quad \alpha y_i := M_{i,6} \quad Dxp_i := M_{i,8} \quad \nu_x := \nu x_{N-1} \quad \nu_y := \nu y_{N-1} \quad \nu_x = 26.424 \quad \nu_y = 25.414$

$$\varepsilon xMI_{ir} := \frac{\varepsilon_{xn95MI}}{\beta_{mi_{ir}} \cdot \gamma_{mi_{ir}}} \qquad \varepsilon yMI_{ir} := \frac{\varepsilon_{yn95MI}}{\beta_{mi} \cdot \gamma_{mi}}$$

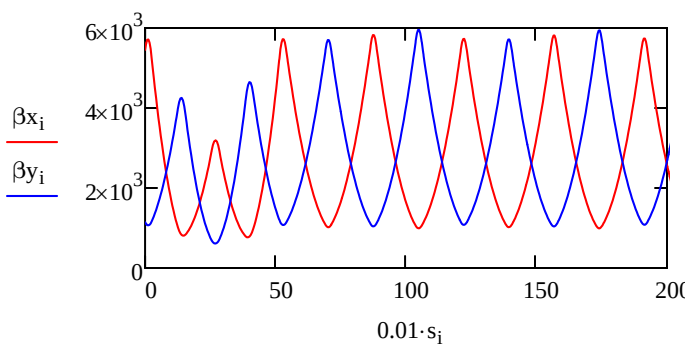

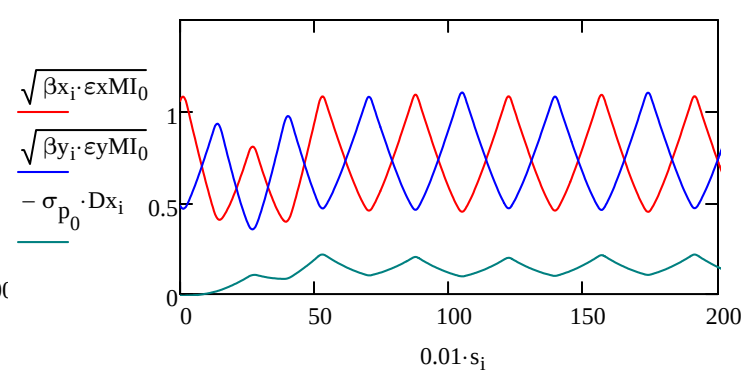

$$\delta\nu_{ySC_{ir}} := \frac{r_p \cdot (14 \cdot N_{be}) \cdot B_{mi_{ir}}}{2 \cdot \pi \cdot (\beta_{mi_{ir}})^2 \cdot (\gamma_{mi_{ir}})^3 \cdot C} \cdot \sum_{j=0}^{N-2} \frac{\beta y_j \cdot (s_{j+1} - s_j)}{\sqrt{\beta y_j \cdot \varepsilon yMI_{ir}} \cdot \left[\sqrt{\beta x_j \cdot \varepsilon xMI_{ir} + (\sigma_{pmi_{ir}} \cdot Dx_j)^2} + \sqrt{\beta y_j \cdot \varepsilon yMI_{ir}}\right]}$$

$$\delta\nu_{xSC_{ir}} := \frac{r_p \cdot (14 \cdot N_{be}) \cdot B_{mi_{ir}}}{2 \cdot \pi \cdot (\beta_{mi_{ir}})^2 \cdot (\gamma_{mi_{ir}})^3 \cdot C} \cdot \sum_{j=0}^{N-2} \frac{\beta x_j \cdot (s_{j+1} - s_j)}{\sqrt{\beta x_j \cdot \varepsilon xMI_{ir} + (\sigma_{pmi_{ir}} \cdot Dx_j)^2} \cdot \left[\sqrt{\beta x_j \cdot \varepsilon xMI_{ir} + (\sigma_{pmi_{ir}} \cdot Dx_j)^2} + \sqrt{\beta y_j \cdot \varepsilon yMI_{ir}}\right]}$$

Space charge tune shifts

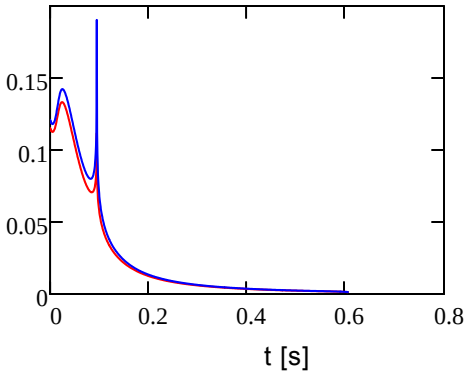

Cycle time: 0.7 s at 60 GeV
1.2 s at 120 GeV

Number of Booster cycles in cycle time:

$0.7 \cdot 20 = 14$ at 60 GeV

$1.2 \cdot 20 = 24$ at 120 GeV

Booster power for 8 GeV program:

$165 \cdot \frac{14 - 12}{14} = 23.571$ kW at 60 GeV

$165 \cdot \frac{12}{24} = 82.5$ kW at 120 GeV

$$\frac{I_{linac} \cdot T_{inj}}{e_{SI}} = 6.841 \times 10^{12}$$

)

l